

## Industrial Nitrile Gloves

- ✓ Acrylonitrile butadiene
- ✓ Category III
- ✓ Green
- ✓ Textured
- ✓ Size 7-10
- ✓ Flocklined

Made of high quality nitrile, the GI/F11 is a complex design glove for high risk and heavy duty applications

### Attributes

- ✓ **Manufactured from** nitrile butadiene
- ✓ **Acrylonitrile butadiene** chemical resistant flocklined glove with textured palm and fingers to increase grip and durability
- ✓ **Cotton flocklined** for increased comfort and reduced perspiration
- ✓ **Ergonomically shaped** to reduce hand fatigue
- ✓ **Long cuff** for better arm protection
- ✓ **Protection** against many solvents, detergents and oils

### Regulatory compliance

- ✓ Manufactured in accordance with:
  - European Personal Protective Equipment Directive 89/686/EEC
  - CE Category: Cat III (0086)
- ✓ Tested to:
  - EN420 Protective gloves: General requirements
  - EN388 Protective gloves: Mechanical hazards
  - EN374-2 Protective gloves: Chemicals and Micro organisms penetration
  - EN374-3 Protective gloves: Chemicals and Micro organisms permeation
- ✓ Shelf life: 3 years



EN388	level
Abrasion	3
Blade cut	1
Tear strength	0
Puncture	1

EN420	Level
Dexterity	5

EN374	Code	Level
Sulphuric acid 96%	L	3
Sodium hydroxide 40%	K	6
N-Heptane	J	6

### Specification

Dimensions	7	8	9	10
Palm Width (mm)	85 ± 5	95 ± 5	105 ± 5	115 ± 5
Length (mm)	Min 300	Min 300	Min 300	Min 300
Thickness (mm)	0.54 ± 0.03	0.54 ± 0.03	0.54 ± 0.03	0.54 ± 0.03

EN420: glove measurements are determined by taking into account the behaviour of the glove material and intended use



### Packing


- 1 pair per pouch
- Inner: 12 pouches per bag
- Outer: 12 bags per case
- Pallet: 32 cases per pallet



## Industrial Nitrile Gloves

### Packaging

#### Outer

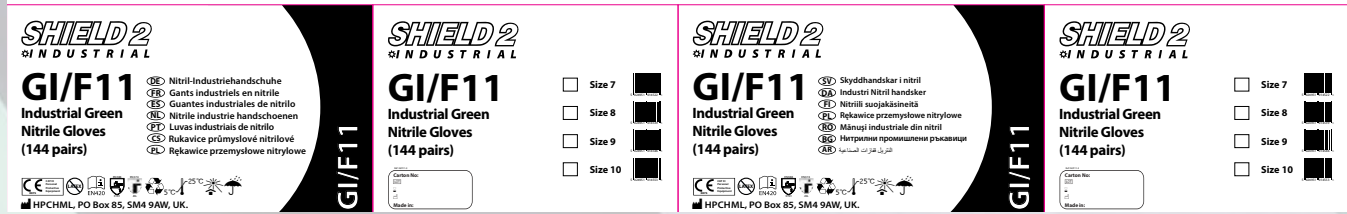

#### Pouch



#### Dimensions

Pouch: 335mm L x 160mm W  
Outer: 620mm L x 350mm W x 170mm H

Barcodes	Size	Inner Barcode	Outer Barcode
	7	5024951014478	5024951014522
	8	5024951014485	5024951014539
	9	5024951014492	5024951014546
	10	5024951014508	5024951014553



Lot number



EN388 Mechanical hazards



Compliant with the Personal Protective Equipment Directive



5°C - 25°C Temperature limitation



Date of manufacture



EN374-2: Micro organism hazards



Latex free



Recyclable packaging



Use by



EN374-3: Micro organism hazards



Keep away from sunlight



Manufacturer



EN1149: Antistatic Properties



EN420: Protective gloves: General requirements



Keep dry

GI/F11/JAN2015

